



GT-35

BUILT FOR LARGE OPERATIONS.



OPEN OR CLOSED
3-MAN CAB




AUTOMOTIVE STYLE
OPERATOR AREA



28,000lb (12,727 kg)
MAX DRAWBAR



OSHA COMPLIANT
WORK SURFACE

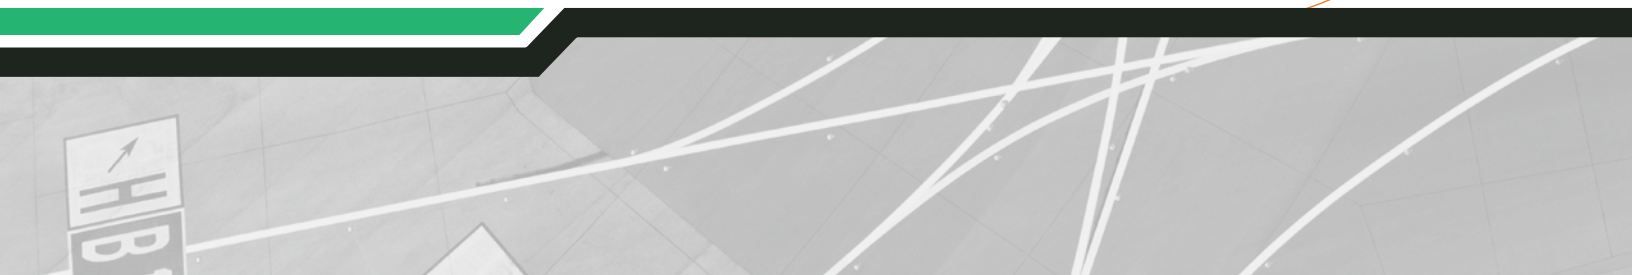

TUG[®] GT-35

Designed to excel in the most demanding ramp environments, the TUG™ GT-35 embodies the perfect balance of power, versatility, and reliability. Delivering unmatched performance while ensuring smooth and efficient ground handling operations, the TUG GT-35 features an automotive-style operation with an OSHA compliant work surface and low-profile deck height of less than 48 in [121 cm] Options regarding the model type, cabin customizations and more allow the TUG GT-35 to be a staple for any ground support operation.

SHARED FEATURES

- Track (2WS)/Optional 4WS Steering System
- 24V Electrical System
- LED headlights, taillights, backup lights and turn signal
- 3-Bucket Seats
- Non-Retractable Seat Belts
- Power Steering
- Multifunction LCD Display



	DEUTZ TCD 3.6L TIER 4 FINAL	CUMMINS TIER 4 FINAL
CHASSIS POWER		
Type	Water-Cooled, Direct Injected, Turbocharged 4 Cylinder, In Line	
Fuel	26 Gal [98 L]; ULSD Only	
Displacement	220 CID [3.6 L]	232 CID [3.8 L]
Governed RPM w/ Full Load	2,300	2,500
Net Brake hp at Governed Speed	74 hp [55.1 kW]	74 hp @ 2,500 RPM
Torque	288 lb-ft [390.5 Nm] @ 1,300 RPM	295 lb-ft [400 Nm] @ 1,300 RPM
Parking Brake	Disc on trans output shaft	
Transmission	ZF 4WG190 [4F/2R]	
DIMENSIONS		
Width	89 in [2,261 mm]	
Length (w/ Standard Rear Hitch)	198.5 in	
Length (w/ Front and Rear Hitch)	211 in	
Length (w/o Hitches)	186 in [4,724 mm]	
Height (w/ Cab)	80.5 in	
Height (w/o Cab)	67 in	
Wheelbase	88 in [2,235 mm]	
Ground Clearance	8 in [203 mm]	
Outside Turning Radius	2WS - 264 in [6,706 mm] / 4WS - 192 in [4,877 mm]	
Minimum Weight	20,000 lbs [9,072 kg]	
Standard Weight	35,000 lbs [15,875.7 kg]	
Maximum Weight	40,000 lbs [18,143 kg]	
STANDARD EQUIPMENT		
Drive Mode	4WD, Interaxle Diff	
Brakes	Brake System: Hydraulic Front & Rear: Wet [Internal] Disc Brakes Parking Brake Actuation: SAHR-Toggle Switch	
Suspension	Front: Trunnion Mount / Rear: Solid Mount	
Hitch	Standard Front and Rear	
PERFORMANCE		
Model	GT35-D4F	GT35-C4F
Max Drawbar Pull	28,000 lbs [12,727 kg]	
Max GVW	40,000 lbs [18,160 kg]	
Tires	Front & Rear: 315 / 80R22.5 Radial, Tubeless	



Specifications are subject to change without notice. Models shown may include optional features.
© 2025 Textron Ground Support Equipment Inc. All rights reserved. 82723-G2 [Rev. 0425]

TEXTRON **GSE**

TEXTRONGSE.COM